






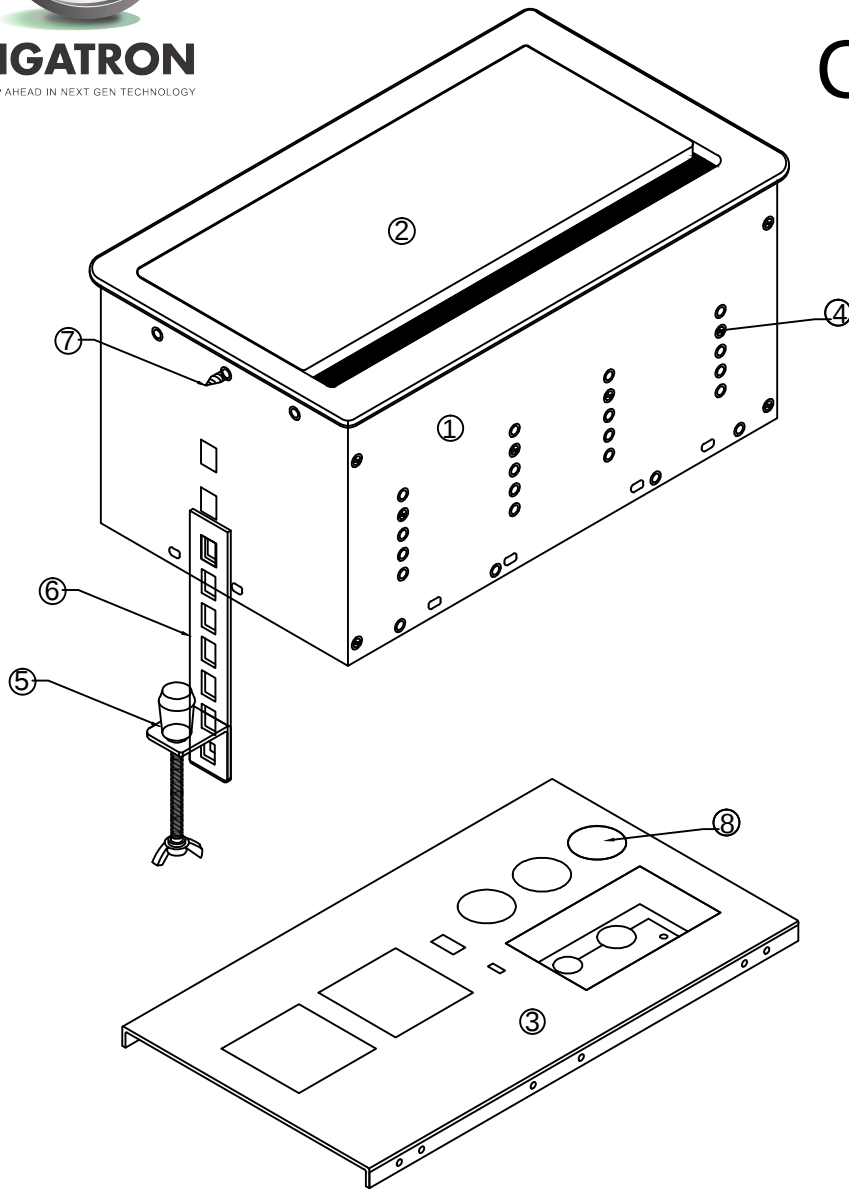


GIGATRON
A STEP AHEAD IN NEXT GEN TECHNOLOGY

CR-M636UC2 Installation Diagram

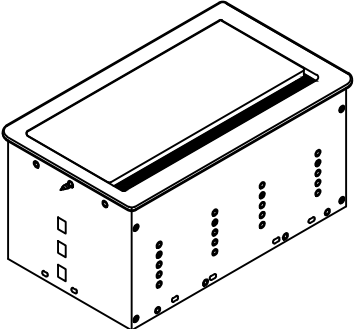

Model No.	Component Name		Specifications L*W*H(mm)	Purpose	Installation Steps
CR-M636UC2	①	Bottom Box	250*144*120	Fix panel and interface board	 1. Cut the desktop surface according to the box dimensions; 2. Place the bottom box into the cutout, and use accessories ⑤, ⑥, ⑦ to fix the bottom box according to site conditions; 3. Connect the cables.
	②	Panel	266*160*5		
	③	Interface Frame	247*142		
	④	Fixing Screw	M3	Fix the interface frame (Height can be adjusted up and down as needed)	
	⑤	Fixing Bracket		Fixing bracket supports desktop max thickness 75mm	
	⑥	Extension piece		Combination of fixing bracket and extension piece supports desktop max thickness 185mm	
	⑦	Fixing Screw	M3*2 Self-tapping Screw	Fix the bottom box on the table	
	⑧	Replaceable XLR port	         	XLR (3-pin Male) 3.5mm Audio BNC/SDI Video 6-pin Conference Network Optical Fiber USB3.0 HDMI 8-pin Conference Mic	

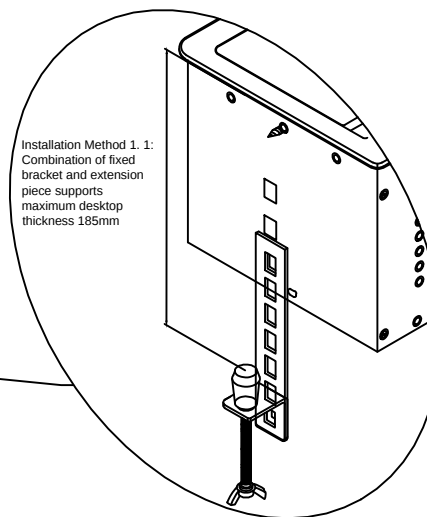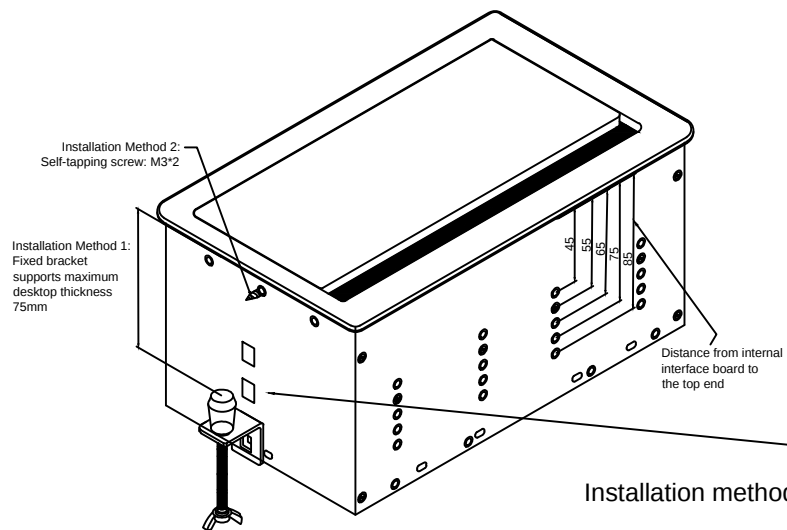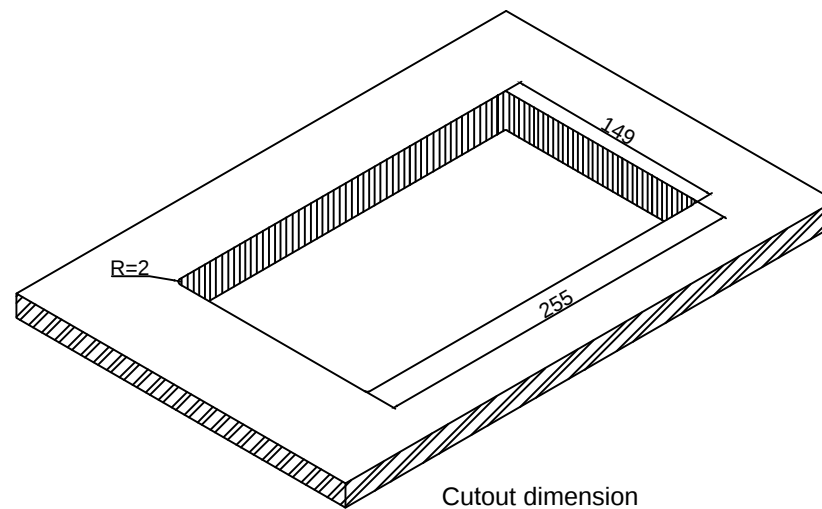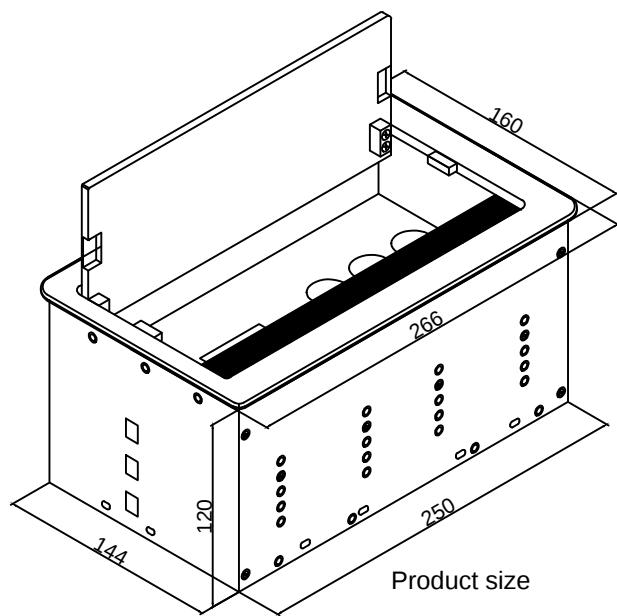

Installation method

Unit: mm